



19 January 2017

Markus Tschech
Hansen Partnership Pty Ltd
Level 8/136 Exhibition Street
Beaconsfield VIC 3000

mtschech@hansenpartnership.com.au

Dear Sir/Madam,

Application No.: T160824 - PC1
Property No.: 1733500400
Address: L1 TP96223, 226 Rix Road, Beaconsfield VIC 3807
Proposal: Plans to Comply

I refer to the above planning permit and your application to comply with permit conditions.

I wish to advise that the plans have been approved under **Condition 23 -BDG** of the Planning Permit.

Please find enclosed your copy of the approved endorsed plans. These plans now form part of the planning permit and should be attached to the permit and kept in a safe place for future reference.

If you have any further queries regarding this matter, please contact Council's Development Services department on **5943 4508** or mail@cardinia.vic.gov.au.

Yours faithfully,

A handwritten signature in black ink, appearing to read "Stephen Powell".

Stephen Powell
Senior Growth Area Planning

APPROVED PLAN
PLANNING AND ENVIRONMENT ACT 1987
CARDINIA PLANNING SCHEME

Permit No.: T160824 PC1
Sheet: 1 of 5
Approved by: Stephen Powell
CARDINIA SHIRE COUNCIL



beaconsfield roses estate – stages 5 & 6

building design guidelines

prepared by hansen partnership pty ltd on behalf of banriar investments pty ltd
may, 2016

**APPROVED PLAN
PLANNING AND ENVIRONMENT ACT 1987
CARDINIA PLANNING SCHEME**

Permit No.: T160824 PC1
Sheet: 2 of 5
Approved by: Stephen Powell
CARDINIA SHIRE COUNCIL

contents

1 introduction	2
2 general requirements	2
3 building design guidelines	2
3.1 building siting and site cover	2
3.2 front setbacks	2
3.3 side and rear setback	2
3.4 frontages	2
3.5 garages	3
3.6 corner lots.....	3
3.7 narrow allotments (<12m in width)	3
3.8 fences.....	3
3.9 landscaping	4

hansen partnership pty ltd
melbourne | vietnam

level 4, 136 exhibition street
melbourne, vic 3000
t 03 9654 8844 f 03 9654 8088
e info@hansen-online.com.au
w www.hansen-online.com.au
ABN 20 079 864 716 | ACN 079 864 716

version	title	date	issuer	changes
d	beaconsfield roses estate stages 5 & 6, building design guidelines	19.05.16	MT	council comments

1 introduction

Stages 5 & 6 of the Beaconsfield Roses Estate will allow for a range of housing styles, responding to the natural features of the land, as well as the surrounding transport network.

The aim of these building design guidelines is to ensure that this development establishes itself as an attractive and welcoming community, exhibiting a high standard of design which consistently addresses its surrounding environs.

2 general requirements

Restrictions relating to building siting, site cover and setbacks cease to apply to a lot 2 years after the issue of a Certificate of Occupancy under the Building Act for a dwelling on a lot.

No variations to these guidelines are permitted without written consent from Cardinia Shire Council.

Where the design parameters provided in these guidelines do not deal with a siting matter regulated under Part 4 of the Building Regulations 2006 (e.g. Overlooking, Overshadowing, Solar access to existing north facing windows etc.), or where the adjoining property is not subject to the same agreement or is not shown on the same certified plan of subdivision, then, in addition to the design guidelines, the requirements of Part 4 of the Building Regulations 2006 (or any other legislation applicable at the time of development) apply.

The Building Design Guidelines do not apply to lots under 300 square metres. The Officer Precinct Structure Plan – Small Lot Housing Code applies to all lots less than 300 square metres within the Estate.

3 building design guidelines

3.1 building siting and site cover

Good building siting enhances the internal and external environment of a dwelling, and can reduce costs associated with both heating in winter and cooling in summer.

Dwellings should be sited and designed to provide adequate solar access to areas of private open space and habitable room windows, and minimise adverse amenity impacts upon neighbouring properties.

Providing meaningful areas of secluded private open space will aid in the liveability of homes, creating outdoor spaces that people will want to use year-round. It is for this reason that areas of private open space should be north-facing, where possible, to provide adequate access to sunlight.

Building site cover must not exceed 60 per cent to allow for adequate areas of private open space.

3.2 front setbacks

Dwellings must be set back at least 4 metres from the front property boundary to allow for attractive front yards and maintain a sense of ‘openness’.

Porches, verandahs and open pergolas with a height of less than 3.6 metres, as well as eaves, fascia and gutter, sunblinds and shade sails, decks, (including steps and landings) that are less than 800mm in height, may encroach into the front setback area by no more than 2.5 metres.

3.3 side and rear setback

Dwellings must be set back at least 3 metres from the rear property boundary. Where a property has a north-facing side boundary and rooms within a dwelling are designed to have a northern orientation and north facing open space, the option exists to reduce the rear boundary setback to 1 metre, where a 3 metre setback is proposed along the northern boundary.

Buildings may be constructed to one side boundary (i.e. zero to 0.15 metre setback) for a length not exceeding 10 metres plus 25 per cent of the remaining length of the boundary of an adjoining lot, and must be set back at least 1 metre from one side boundary.

The height of a new wall constructed on or within 0.15 metres of a side or rear boundary should not exceed an average of 3.2 metres with no part higher than 3.6 metres unless abutting a higher existing or simultaneously constructed wall.

Porches, verandahs, open pergolas, eaves, fascia and gutter, privacy screens, masonry chimneys, sunblinds, shade sails, flues, pipes, decks, domestic fuel tanks, water tanks, heating and cooling equipment and other services may encroach into the aforementioned setback areas by no more than 0.5 metres (unless they interface with north facing windows).

3.4 frontages

Attractive building frontages improve the appearance of a neighbourhood, can make it a more pleasant place to live and can enhance property values.

Dwellings, associated structures and landscaping are to create an interesting and attractive street frontage. This is to be achieved through creating building entry points that are clearly identifiable from the street and including entrance treatments, such as front porticos or verandahs.

Verandahs, porticos and porches are to have a maximum height of less than 3.6m above natural ground level, and be a minimum 4m² in area with a depth of 1m.

Building services, pipes and water tanks (excluding solar panels) are to be located to the side or rear of dwellings and hidden from public view from the street.

Large expanses of featureless walls are to be avoided through the articulation of the front façade and incorporation of elements such as doors, windows, verandahs, decks and a varied materials palette.

Maintaining passive views of the street and footpath improves the safety and interactivity of this neighbourhood. A high level of passive surveillance of the street and footpath should be allowed for through the inclusion of windows facing the street.

Roller shutters are not permitted along front facades.

3.5 garages

Garages and carports must be set back equal or greater than the setback of the main building line of the dwelling. Garage design must be consistent with the remainder of the house and be of a similar palette of materials and colours. Roller doors and zincalume garages are not permitted.

In order to avoid garages and carports dominating the street frontage, garages must be set back a minimum 5.5 metres from the street.

Garage openings for single storey dwellings are to constitute no more than 40 per cent of the width of the frontage of a lot.

For double storey dwellings, garages must not exceed 25 per cent of the area of the front façade of the dwelling.

3.6 corner lots

Where a lot is located on a corner, buildings must be designed to address both frontages by incorporating a façade which wraps around the second frontage, providing an appropriate corner feature, for a minimum of 4m.

Façades to both streets are to incorporate visually interesting features such as awnings, verandahs and decks and must present a habitable room window, forward of the side boundary fence, to each frontage. If the dwelling is double storey a habitable room window must be provided at both levels.

Buildings must be set back at least 2 metres from the side street boundary.

Any side boundary fences facing the street must be set back at least 4 metres from the dwelling line,

Solid side boundary fences must not exceed 50 per cent of the lot length from the rear boundary. Remaining fencing must be at least 40 per cent transparent and no greater than 1.5 metres in height.

Where side boundary fences facing the street are greater than 1 metre in height, they must be set back a minimum 9 metres from the point of intersection, with railings facing into the property.

Garages must not be located on the corner section of the allotment facing 2 streets and must be located on or close to the side boundary that adjoins the neighbouring allotment.

For the purpose of these guidelines, the narrower of the two frontages is considered to be the primary street frontage and shall present as the architectural and frontage of the dwelling.

3.7 narrow allotments (<12m in width)

Dwellings on narrow allotments (less than 12 metres in width) are only permitted a single car garage to the street frontage; unless the dwelling is double storey, in which case the requirements at Section 3.5 of these Guidelines apply.

Two cars accommodated in a tandem arrangement may be permitted where it does not conflict with any other provisions of these guidelines.

3.8 fences

Fences must respond to the prevailing neighbourhood character and landscape design, with materials complementing those of the dwelling.


Front boundary fences must not exceed 1.2 metres in height and be a minimum 40 per cent transparent (where not located on a corner).

Side and rear fences are not to exceed 2 metres in height, and are to comprise timber paling with appropriate capping. Where fences are to be painted, they are to be of neutral tones.

Side boundary fences (where not located on a corner lot) must terminate a minimum of 2m behind the dwelling line to maintain an open streetscape.

Side fencing which returns from a front fence along a side boundary:

- Must not exceed 1.2m in height
- Must be at least 40% transparent.
- Must continue to a minimum of 2m behind the dwelling line.

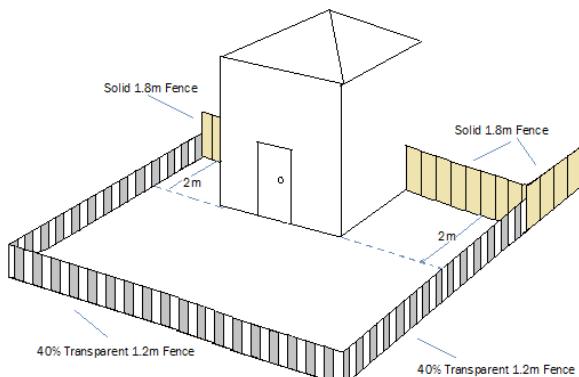

3.9 landscaping

Each lot must provide attractive landscaping to all street frontages, in order to enhance the overall appearance of the neighbourhood and complement the design of the dwelling.

Landscape design should utilise a range of drought resistant species where possible, and must include at least 1 canopy tree within the front setback.

A minimum 20 per cent of the property must remain free of impervious surfaces.

All landscape elements within the front yard, including driveways and pathways must be completed within 3 months of obtaining a Certificate of Occupancy.

3.10 dwelling diversity

Two dwellings of the same façade design shall not be built within three dwellings of the subject property, including lots either side and opposite the subject property. Three dwellings of the same façade may not be built within the same street.

3.11 driveways

A minimum allowance of 300mm for garden planting is required between a driveway and a side boundary. This does not apply when a crossover is constructed as part of a double-crossover with an adjoining lot. Landscaping strips are not permitted between double crossovers.

Driveway widths must match the width of the crossovers but may taper thereafter to align with garage widths.

Only one crossover is permitted for each lot.

Gravel and uncoloured concrete driveways are not permitted.

Driveways must be fully constructed prior to a certificate of occupancy being obtained.

3.12 eaves to frontages

Where there are eaves to the frontage of a building, they must return a minimum of 3 metres around the side elevations.

If the site is a corner allotment, the eaves must return the length of the second frontage.

3.13 roofs

Roofs must be constructed of low reflective materials. Cement sheeting and zincalume are not to be used in roof construction.

3.14 recycled water

All buildings must incorporate plumbing for recycled water supply for toilet flushing and garden watering use to allow for future connections should it become available.

