

TABLE OF SERVICE LOCATIONS

STREET NAME	SEWER	WATER	NDW	GAS	COMMS	ELEC	*POLES	BOK
WATTLE CRESCENT	1.00 S	3.20 N	2.70 N	2.25 N	1.775 S	2.60 S	1.00 N	4.20 N 3.90 S
ICEBERG ROAD SOUTH OF WATTLEVIEW DRIVE	1.00 W	3.80 W	3.30 W	2.80 W	2.80 E	3.30 E	-	6.40 W 5.70 E
ICEBERG ROAD NORTH OF WATTLEVIEW DRIVE	1.30 W	3.80 W	3.30 W	2.80 W	2.80 E	3.30 E	-	6.40 W 5.70 E

\* FROM BACK OF KERB

TBM SCHEDULE

I.D.	TYPE	EASTING	NORTHING	LEVEL
TBM 1	SPIKE	358001.801	5786203.706	43.75
TBM 2	SPIKE	358092.820	5786180.665	43.38
TBM 3	SPIKE	358146.664	5786168.642	43.10
TBM 4	SPIKE	358298.685	5786134.676	42.04
TBM 5	STEEL ROD	357964.123	5785962.520	42.69
TBM 6	STEEL ROD	358055.160	5785948.114	42.35
TBM 7	STEEL ROD	358118.940	5785961.211	42.26
TBM 8	STEEL ROD	358167.717	5785925.992	42.11

NOTE: LOCATION OF TBM FOR TBM'S LOCATED OUTSIDE OF SCOPE REFER TO STAGING PLAN.

NOTE: FENCES ALL DAMAGED FENCES TO BE REPLACED TO THE SATISFACTION OF SITE SUPERINTENDENT AND RESPECTIVE LANDOWNERS.

NOTE: END OF PAVEMENT WORKS CONCRETE EDGE STRIP AND AG DRAIN TO BE INSTALLED TO THE END OF ALL PAVEMENT WORKS.

NOTE: EXISTING SERVICES ALL EXISTING SERVICES UNDER NEW AND PROPOSED ROAD PAVEMENT, FOOTPATH AND DRIVEWAYS TO BE FCR BACKFILLED.

NOTE: EXISTING STRUCTURES ALL EXISTING DRAINAGE PITS AND SEWER STRUCTURES WITHIN NEW WORKS ARE TO BE ADJUSTED TO MATCH NEW FINISHED SURFACE LEVELS.


NOTE: TACTILE PAVING TACTILE GROUND SURFACE INDICATORS (TGS'S) ARE SHOWN INDICATIVELY AND SHOULD BE CONSTRUCTED IN ACCORDANCE WITH AS/NZS 1428.4.1:2009.

CAUTION! ALL EXISTING SERVICES IN THE VICINITY OF WORKS SHALL BE PROTECTED AND KEPT IN FUNCTIONAL STATE AT ALL TIMES DURING WORKS.

BEWARE! NBN OPTIC FIBRE CABLES IN THE VICINITY OF WORKS. TEL: 1800 687 626.

WARNING! NO DRAINAGE WORKS SHALL COMMENCE UNTIL THE CONTRACTOR CONFIRMS THE I.L. OF ALL EXISTING DRAINS, AND CONFIRMS IN WRITING WITH THE ENGINEERING SUPERVISOR.

WARNING! THE LOCATION OF EXISTING SERVICES SHOWN ON THESE PLANS MUST BE PROVEN ON SITE, THE APPROPRIATE AUTHORITY MUST BE CONTACTED AND THE SERVICES LOCATED PRIOR TO COMMENCEMENT OF ANY WORKS.

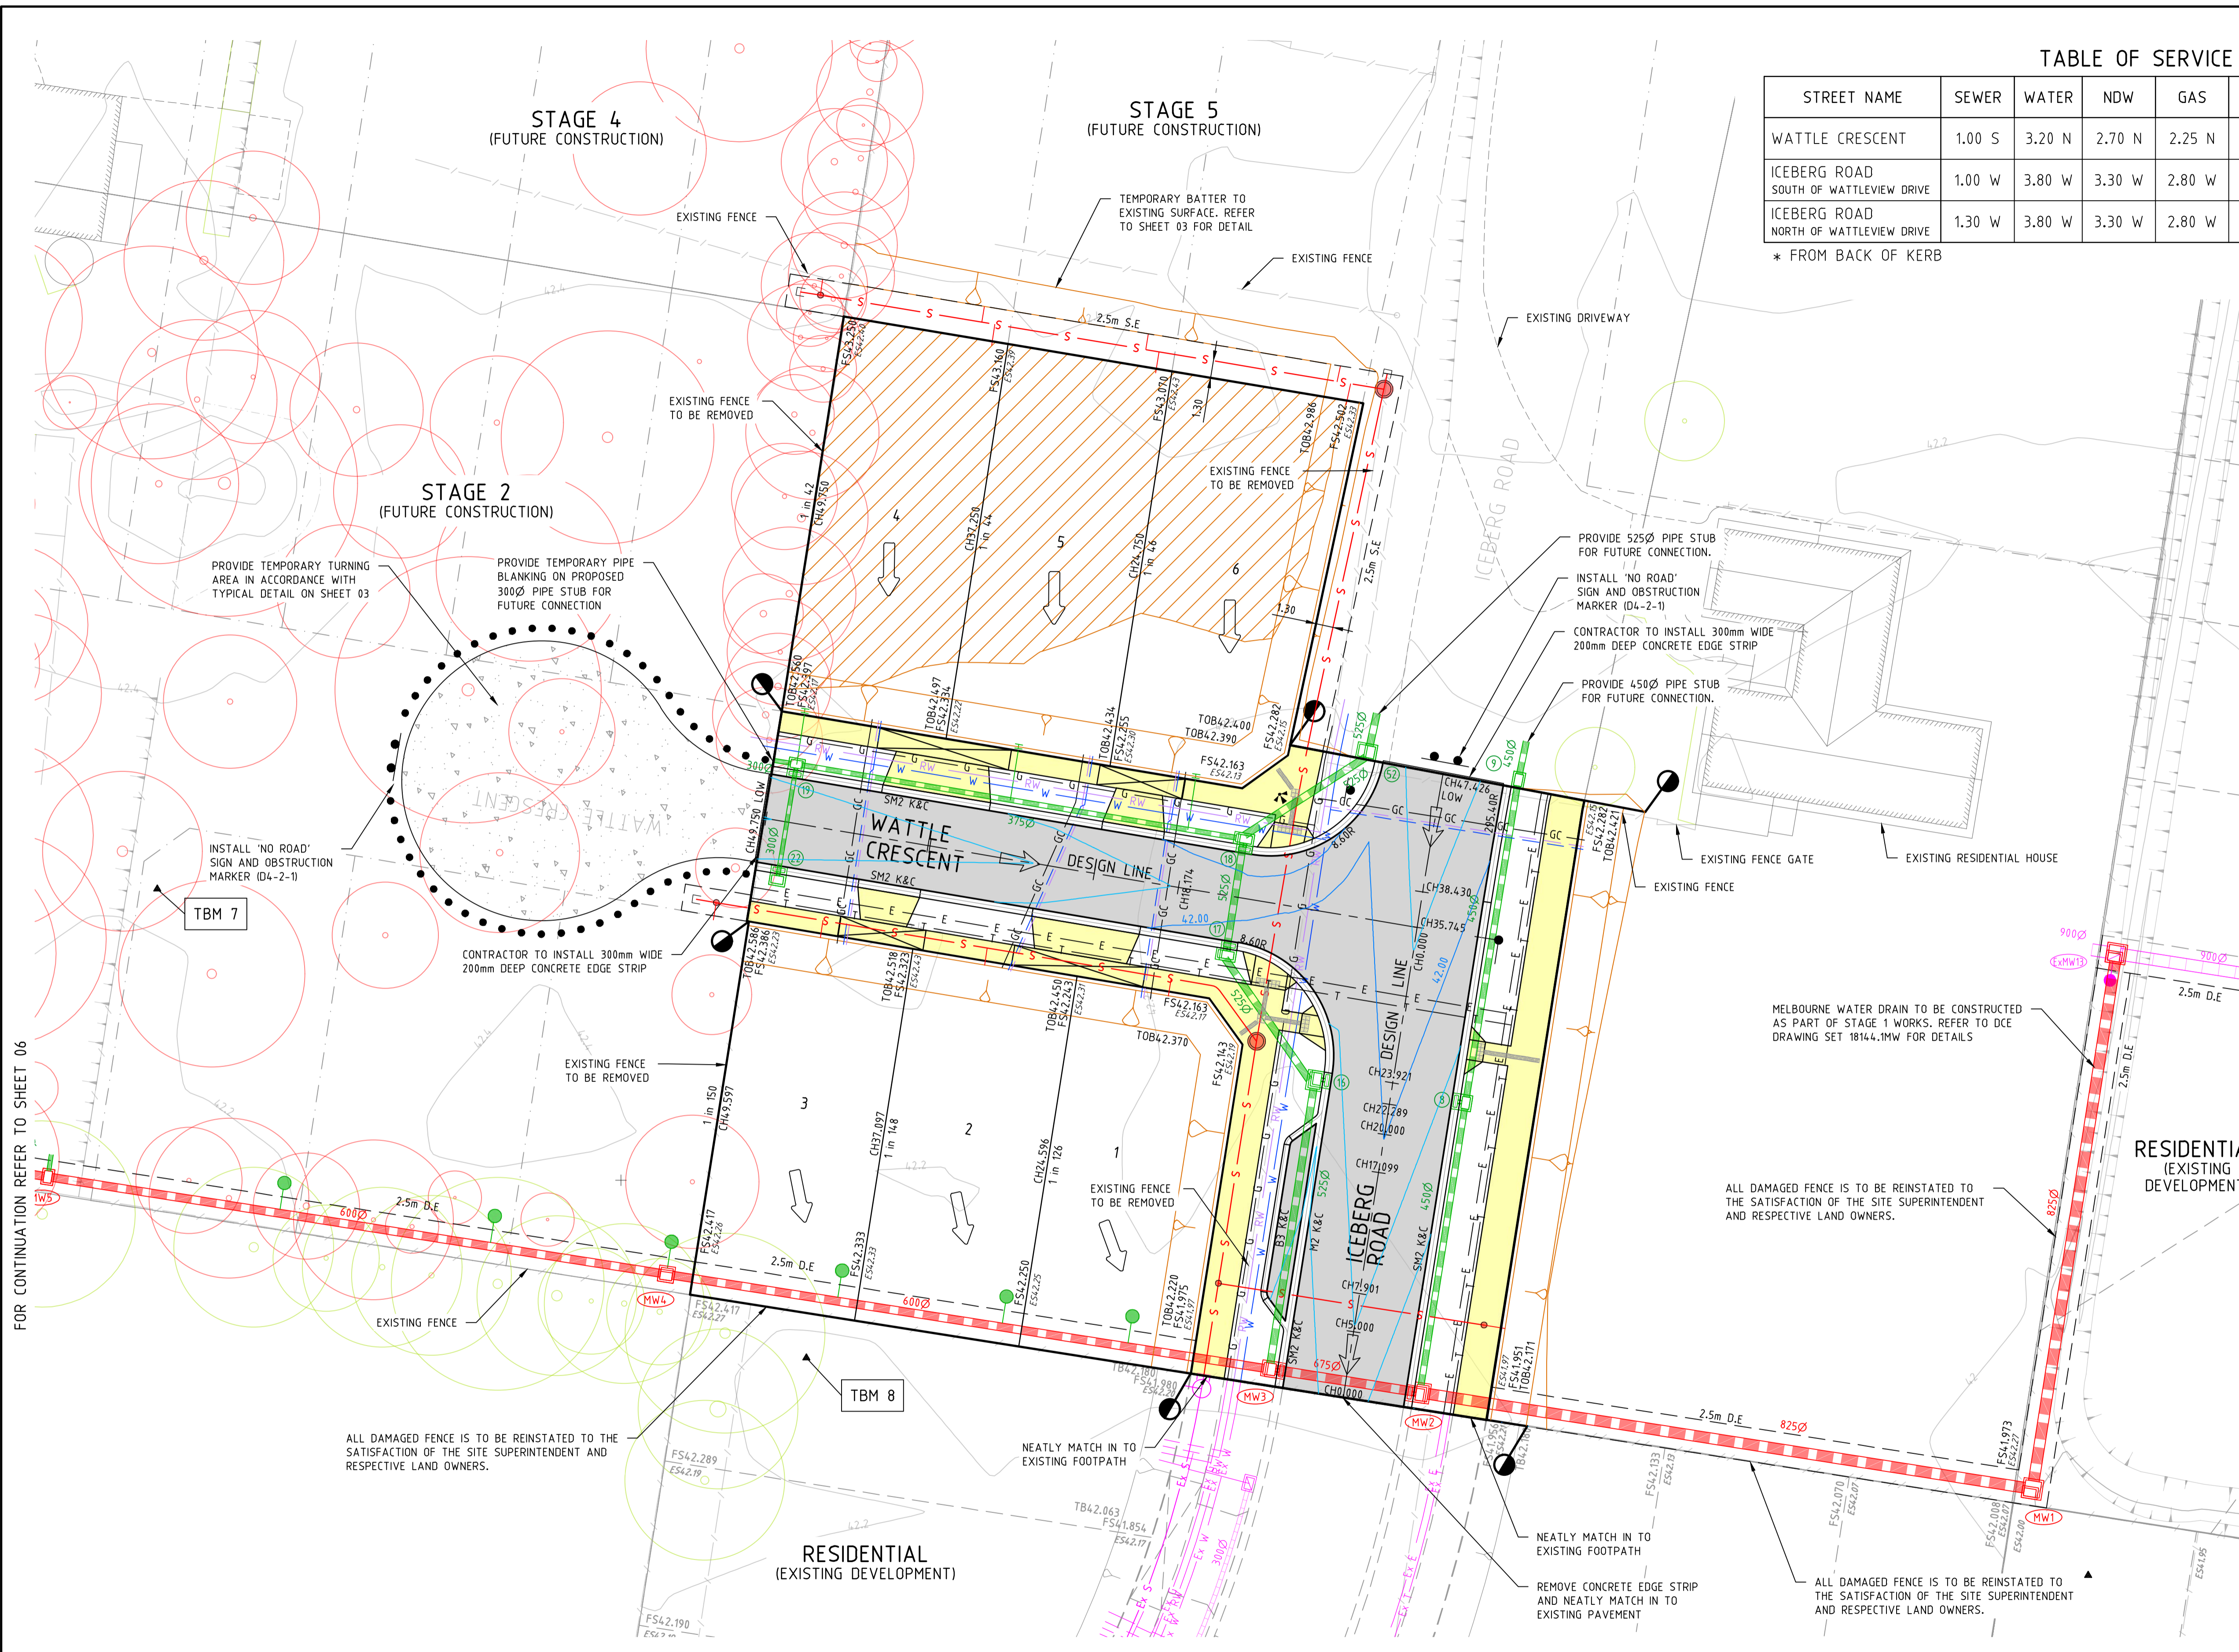

FOR CONTINUATION REFER TO SHEET 06

Drawing File: C:\2d\_Synergy\Bentley\PROJECTS\18144-Beaconsfield Wattle Estate - Stage 1\_1998\1\_DESIGN\01\_A040\04\_00\18144-0401.dwg - 01/01/2021 - 12:12pm - jpbah.burns  
 Date/Time: Fri Oct 29, 2021 - 12:12pm - jpbah.burns

REV	DESCRIPTION	DATE	AMEND	APPD
2	SEWER EASEMENT AMENDED	29/10/21	JB/JB	TL
1	STREET NAMES AMENDED	04/02/21	JB/JB	TL
0	CONSTRUCTION ISSUE	12/01/20	JB/JB	TL

Drawn: B. SHADE  
 Date: 01/06/20  
 AN 1271284  
 Designed: C. BLISSETT  
 Date: 20/05/2020  
 AN 2771019  
 Checked: T. THAVENDRAN  
 Date: 30/09/2020  
 AN 944061  
 Approved: T. LIAKOPOULOS  
 Date: 12/01/21  
 AN 889017

**LEGEND**

Ex W	EX. WATER MAIN	E	ELECTRICITY	MW	MW MAIN DRAIN & PIT
Ex RW	EX. RECYCLED WATER MAIN	T	TELECOMMUNICATIONS	SW	SW DRAIN & PIT
Ex G	EX. GAS MAIN	G	GAS	H	HOUSE DRN   PROP. INLET
Ex E	EX. ELECTRICAL CABLE	GC	GAS CONDUIT	B	BATTER
Ex S	EX. SEWER MAIN & MH	W	WATER	FS21.650	FINISHED SURFACE LEVEL
Ex C	EX. COMM. CABLE & PIT	RW	RECYCLED WATER	ES02.06	EX. SURFACE LEVEL
Ex D	EX. DRAIN & PIT	WC	COMBINED WATER & REC. WATER CONDUIT	TOB21.650	TOP OF BATTER LEVEL
PSM	PSM   TBM	S	SEWER MAIN & MANHOLE	REG	REGRADE LOT AT MIN 1:50

OVERLAND FLOW PATH  
 LIMIT OF WORKS  
 EX. TREE TO REMAIN  
 EX. TREE TO BE REMOVED  
 ASPHALT PAVEMENT  
 FILLING OVER 300mm  
 CONCRETE PATH | D'WAY

Coords: MGA Levels: AHD  
  
 Scale @ A1/A3 1:250 / 1:500

**BANRIAR INVESTMENTS**  
 BEACONSFIELD WATTLE ESTATE  
 STAGE 1  
 190 KENILWORTH AVENUE, BEACONSFIELD  
 CARDINIA SHIRE COUNCIL  
 DETAIL PLAN  
 SHEET 01 OF 02  
 Drawing No. 18144.IDP01 Rev 2  
 Sheet No. 05 of 20

DALTON CONSULTING ENGINEERS  
 ABN 78 429 221 049  
 QUEENSLAND  
 T 61 7 3374 9000  
 W dceng.com.au  
 E info@dceng.com.au  
**CONSTRUCTION**